
IFT 6113 REMESHING


tiny.cc/ift6113

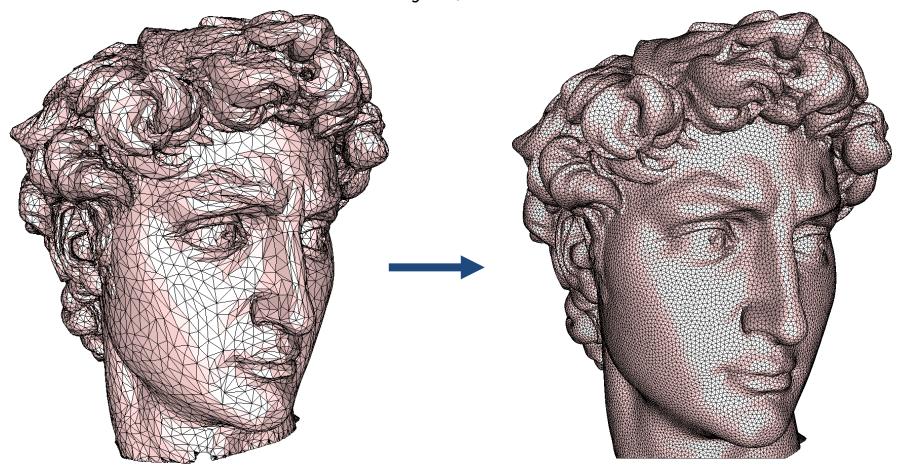

$Mikhail \underset{\text{Some slides from Alla Sheffer}}{Bessmeltsev}$


Re-Meshing Surfaces

Generate a **better** mesh close to the original surface

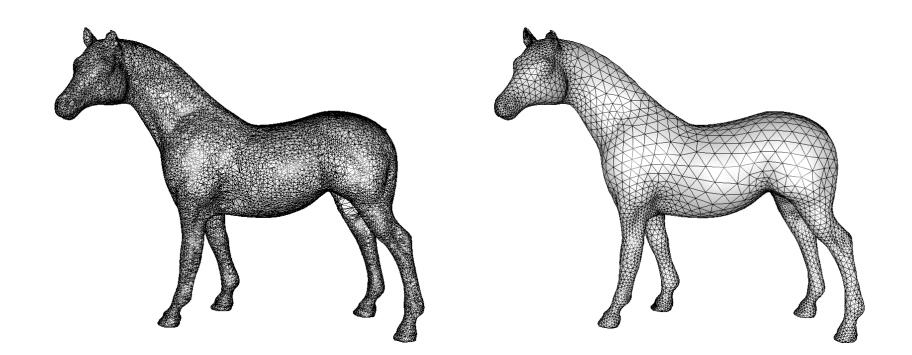

Motivation

- Numerical stability
- Easier modeling
- Quality requirements

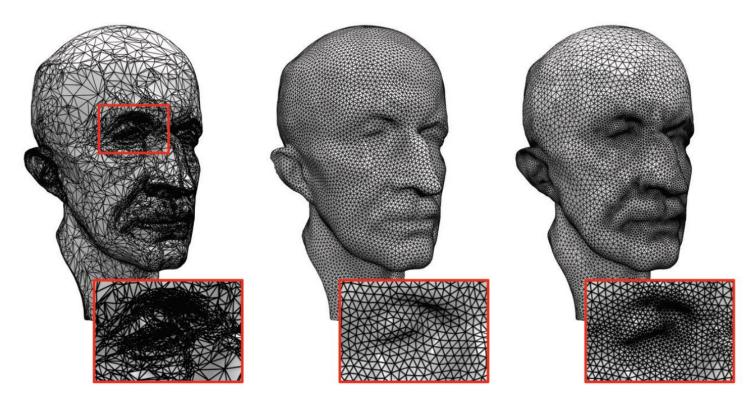


What's a good mesh?



How to (re)mesh surfaces?

Delaunay triangulation?

- What is Delaunay criterion on surface?
 - Option 1: Use sphere instead of circle
 - Works for volumetric meshes (tets)
 - Option 2: Use pairwise test only
 - Theoretical Delaunay properties?
 - Option 3: Intrinsic Delaunay
- Boundary recovery = Approximation quality

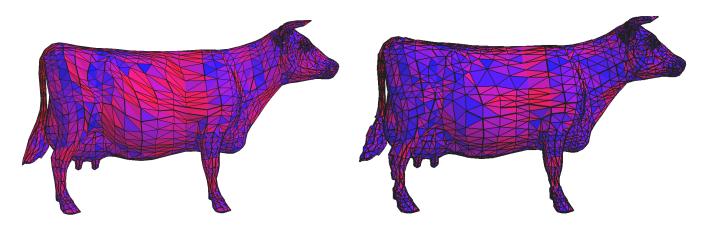

Approaches

- Mesh adaptation/Local Remeshing
 - Locally update mesh while tracking error
- Reduction to 2D/Global Remeshing
 - Parameterize in 2D
 - Mesh in 2D
 - Project back

Approaches


- Mesh adaptation/Local Remeshing
 - Locally update mesh while tracking error
- Reduction to 2D/Global Remeshing
 - Parameterize in 2D
 - Mesh in 2D
 - Project back

Local approach


- 1. Refine/Coarsen to satisfy sizing
- 2. Smooth mesh
- 3. Perform flips after every other operation

4.

Store original to compute distance/error

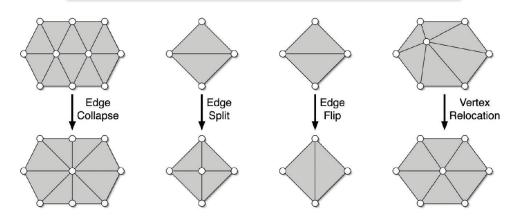

Local approach

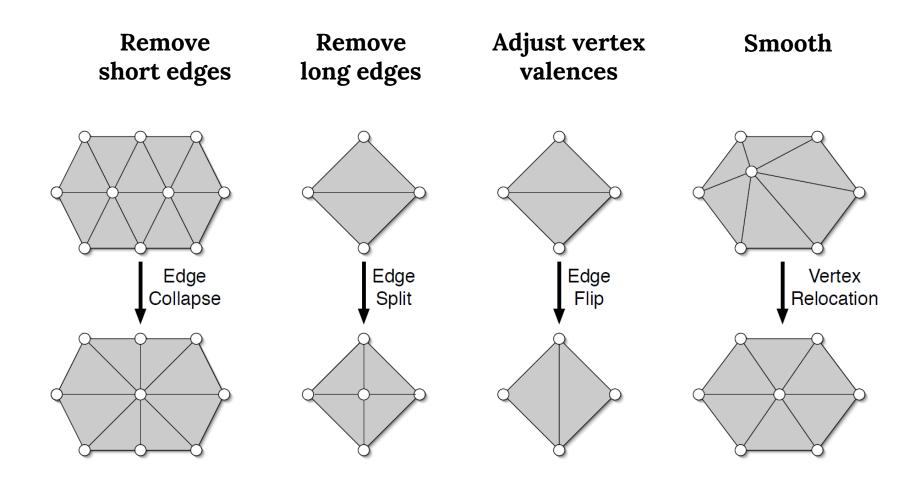


Edge Flip

Flip one diagonal if longer than the other 3D equivalent of Delaunay test in 2D

Track approximation error (why?)

- Approximate Hausdorff metric
 - Normal error
 - Smoothness



Test self-intersection

– Complexity? Maybe skip?

If P,Q are sets, $H_P(Q) = \max_{p \in P} \min_{q \in Q} \|p - q\|$ Hausdorff Metric: $H(P,Q) = \max(H_Q(P), H_P(Q))$

On mesh approximate by

- measuring vertex to surface distance
- measuring vertex to vertex distance
- Computation complexity?


Measuring Error

Hausdorff is expensive => cheat

Idea 1: Stay within an ε-envelope



Measuring Error

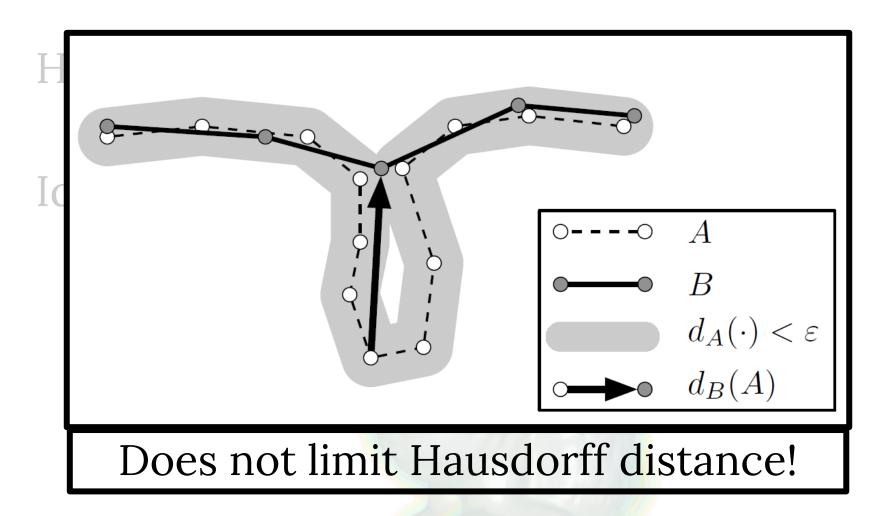

Local approach: Edge split

Reach desired sizing or element count


Strategy


Split long edges – insert mid-points

Project to **original** mesh

Hard to achieve good spacing

Improve by smoothing




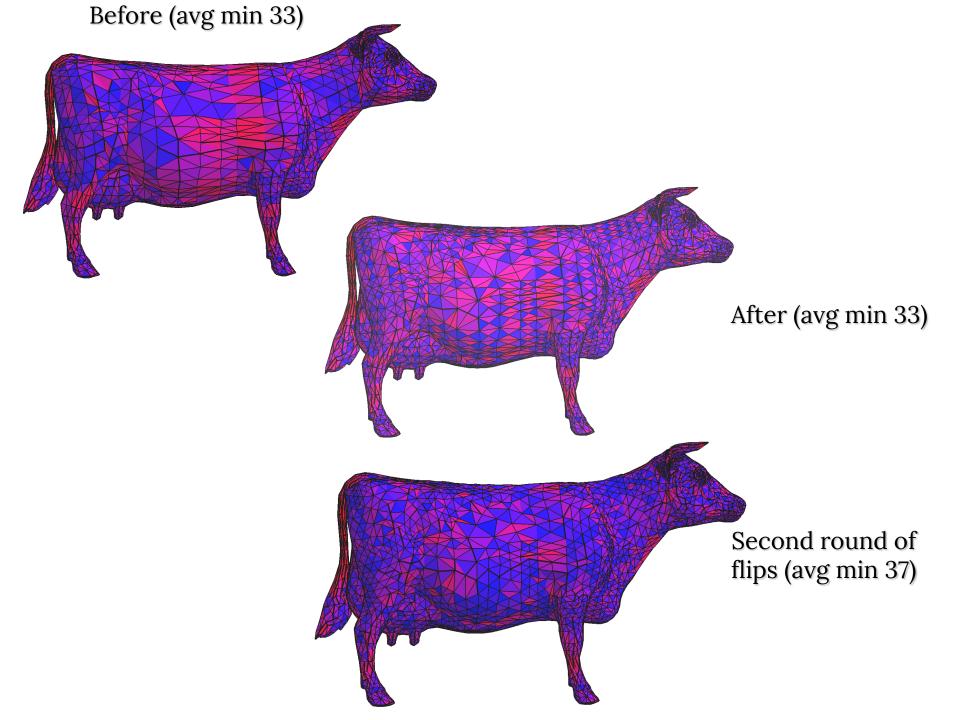

Mesh Adaptation: Smoothing

Local Laplacian smoothing

Stay on the surface!

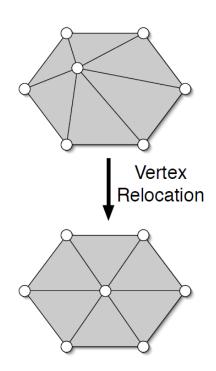





Edge Collapse Algorithm

- Simplification operation:
 - Edge collapse (pair contraction)

• Error metric: distance, pseudo-global

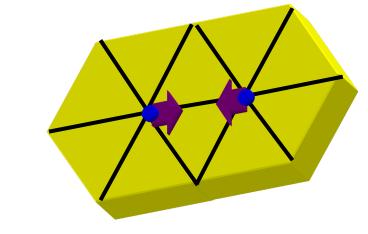

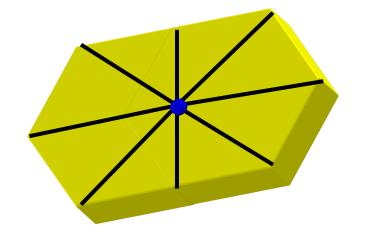



Edge Collapse Algorithm


• Simplification operation:


Where should we place the vertex?

• Error metric: distance, pseudo-global



Where to place the new vertex?

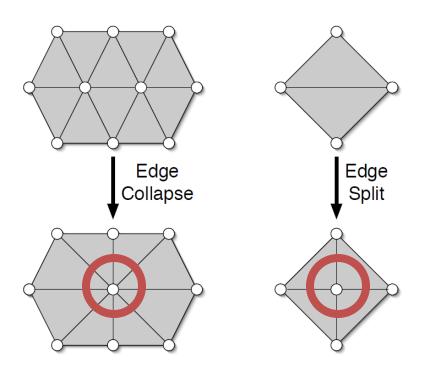


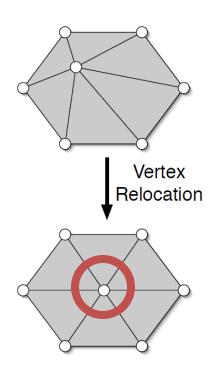

Projection to Original Mesh


Nearest point

- Expensive search
 - Find original face closest to (estimated) new vertex
- Unlimited Hausdorff error

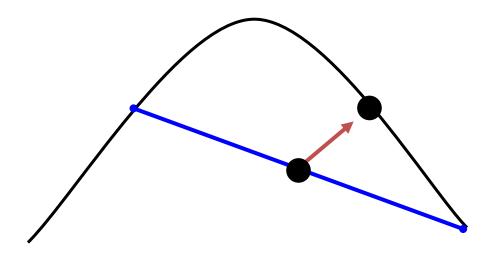

Vertex relocation


- Project all adjacent vertices on a tangent plane
- 2. Find new location in the plane Barycentric coordinates in the **new mesh**



Vertex relocation

- Project all adjacent vertices on a tangent plane
- 2. Find new location in the plane Barycentric coordinates in the **new mesh**


How to project to the original surface?



Vertex relocation

Which 2D triangle does it belong to?
Use triangle vertices'

- triangle indices,
- barycentric coordinatesw/r to the **original mesh**

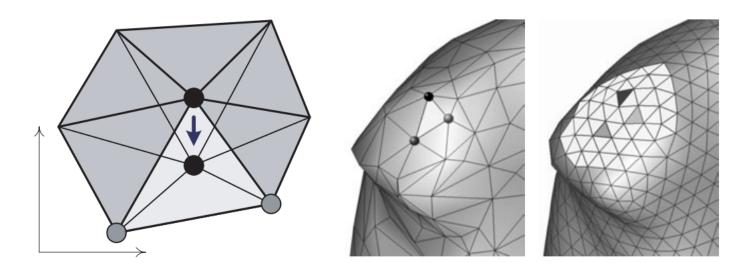


Local Parameterization

Compute a local parameterization for the original mesh

Use the barycentric coordinates to place the vertex in 2D

Lift the vertex in 3D using the parameterization

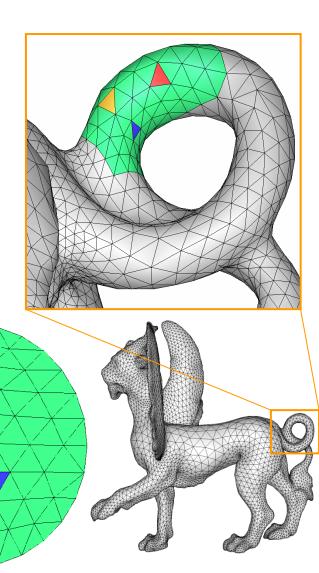

Local Parameterization


Idea:

use barycentric coordinates

Parameterize surface


Place the new vertex in 2D using

Lift to 3D

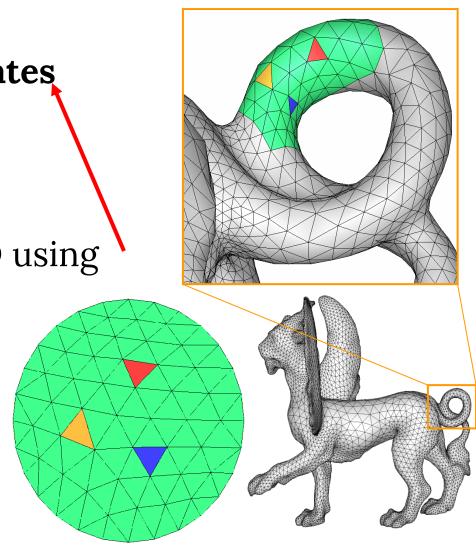

Cheap Local Parameterization


- Project vertex v + neighbors to tangent plane
- 2. Move v in the plane
- 3. Find new triangle in which vertex is located
- 4. Compute barycentric coordinates in this triangle
- 5. Lift back to 3D

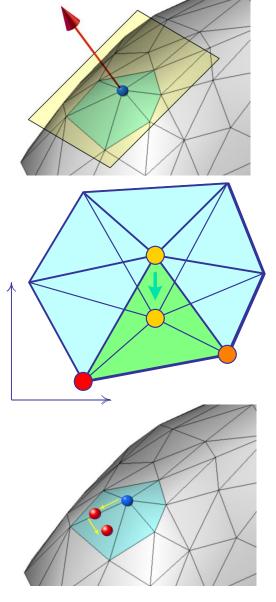

Projection to Approximate Surface

Original mesh approximates "unknown" smooth surface

- Construct local approximation (e.g. quadric)
- Or use vertices + normals of triangle to define patch
 - Hermite, Bézier,...

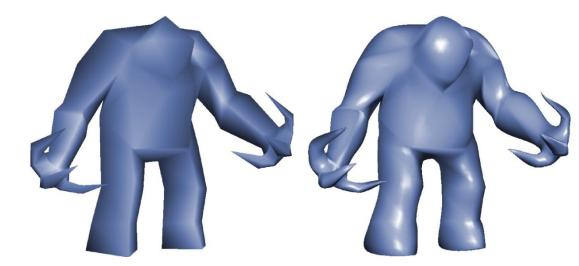

Local approach: Edge collapse


Mesh simplification!


Operations:

- Vertex removal
- Edge collapse
 - Project new vertex to original surface as in refinement


Approximation Error

- Quadrics
- Normal based

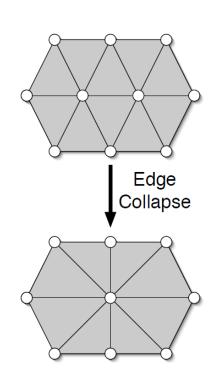


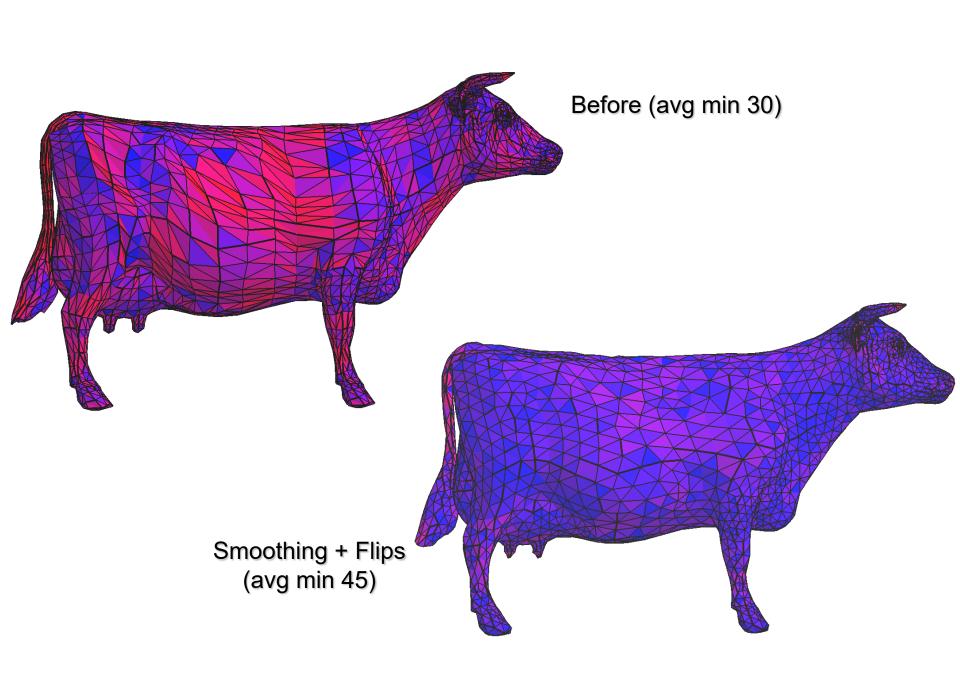

Michelangelo's David

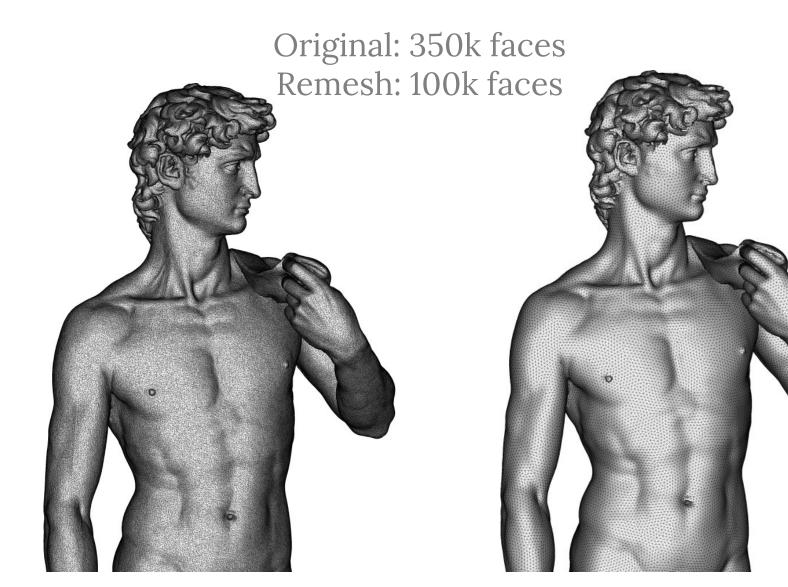

David: Zoom in

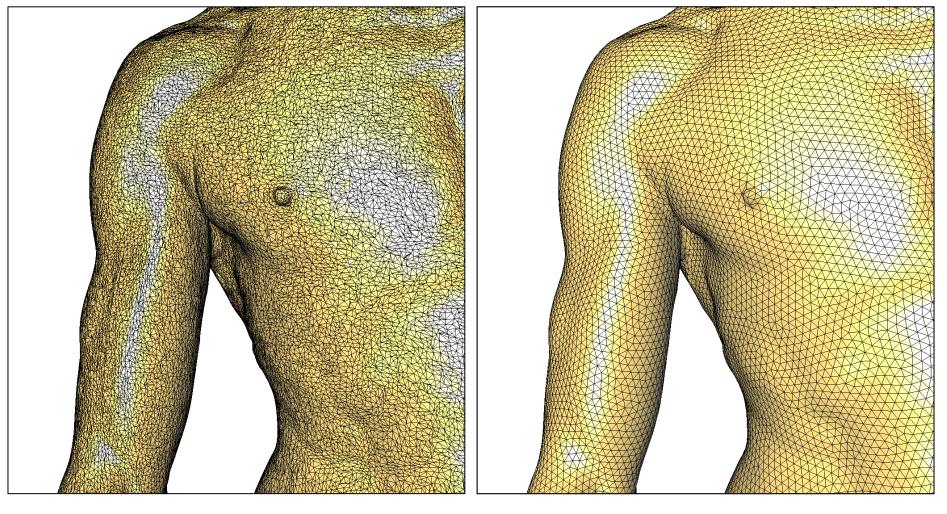

Original

Remesh

Local approach

Modify existing mesh using sequence of local operations


- Fast
- Simple to implement
- Hard to find good spacing of vertices
- Heuristic
 - How to combine local operations?


Approaches


- Mesh adaptation/Local Remeshing
 - Locally update mesh while tracking error
- Reduction to 2D/Global Remeshing
 - Parameterize in 2D
 - Mesh in 2D
 - Project back


Reduction to 2D/Global Remeshing

- 1. Segment surface into charts
 - How? How many charts?
- 2. Parameterize in 2D
 - Which parameterization to choose?
- 3. Mesh charts in 2D (Delaunay)
 - Sizing ~ distortion
 - Take care of shared boundaries
- 4. Project back











Parameterization


• Distortion is inevitable, but

- Can handle some stretch
 - Measure & take into account during 2D meshing
 - Use as component of local sizing
- → Look for a conformal map






Impact of distortion

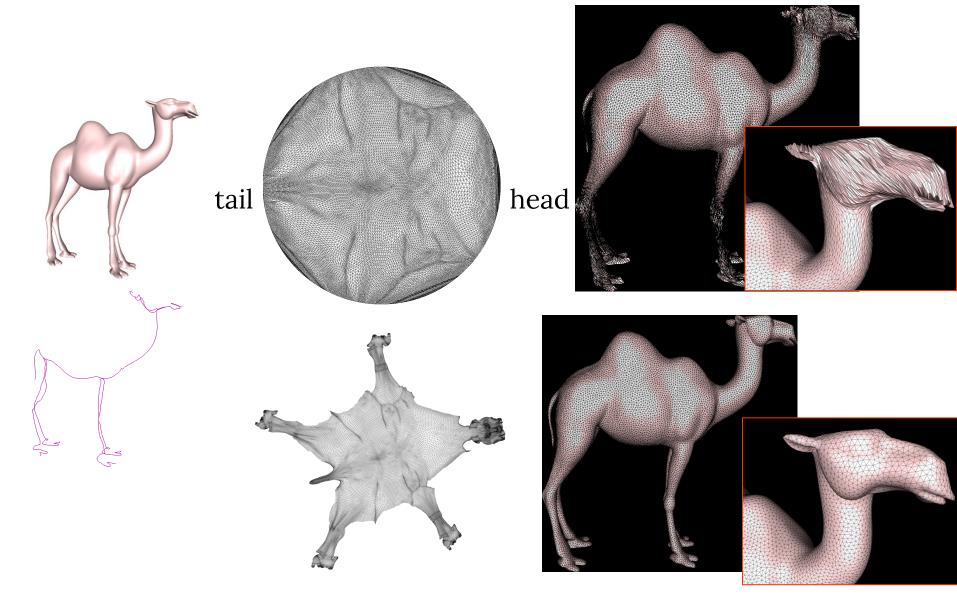


How to control sampling?

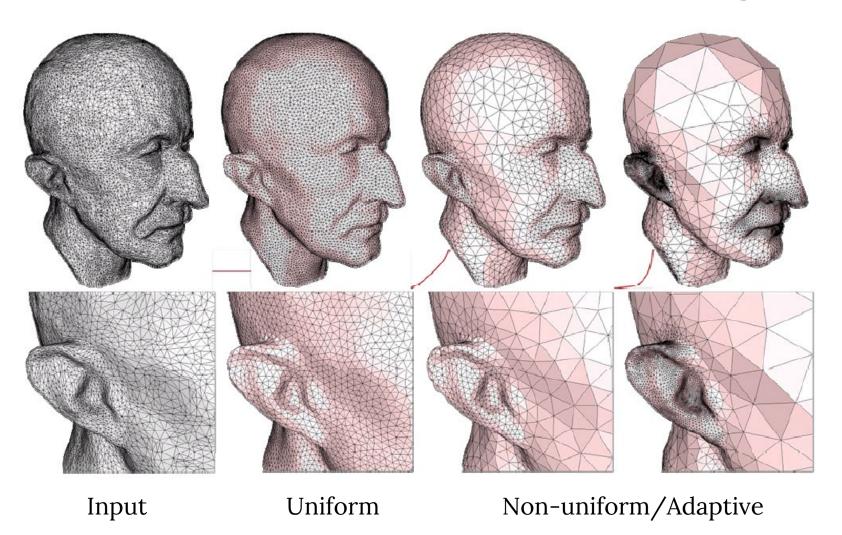

How to control sampling?

- Sample random points?
 - Density ~ parameterization stretch
 - Issue?

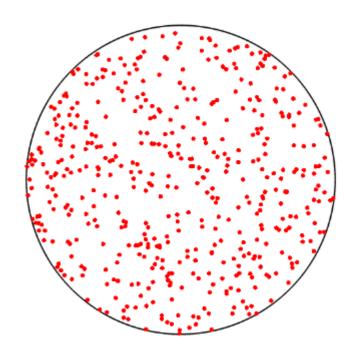

$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$

$$= \sum_{i=1,...,n} \int_{R_i} ||x_i - x||^2 dx$$

$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$


$$= \sum_{i=1,...,n} \int_{R_i} ||x_i - x||^2 dx$$

For fixed x_i , what are the optimal R_i ?

$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$

$$= \sum_{i=1,...,n} \int_{R_i} ||x_i - x||^2 dx$$


For fixed x_i , what are the optimal R_i ?



$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$

$$= \sum_{i=1,...,n} \int_{R_i} ||x_i - x||^2 dx$$


Vice-versa?



$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$


$$= \sum_{i=1,...,n} \int_{R_i} ||x_i - x||^2 dx$$

Global optimum: a Voronoi tessellation with sites = centroids of Voronoi cells



Centroidal Voronoi Diagram


Points spread evenly

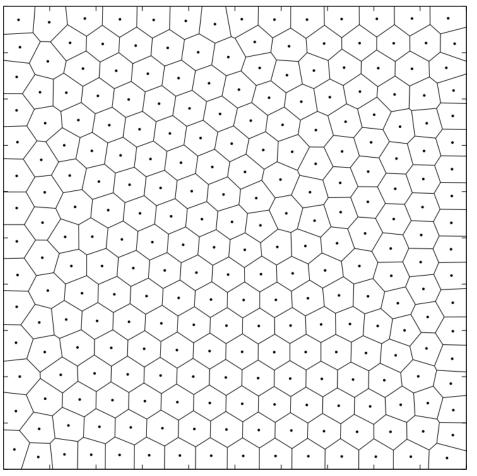

Centroidal Voronoi Diagram

Alternate two steps:

- 1. Compute Voronoi cells
- 2. Move sites to their centroids

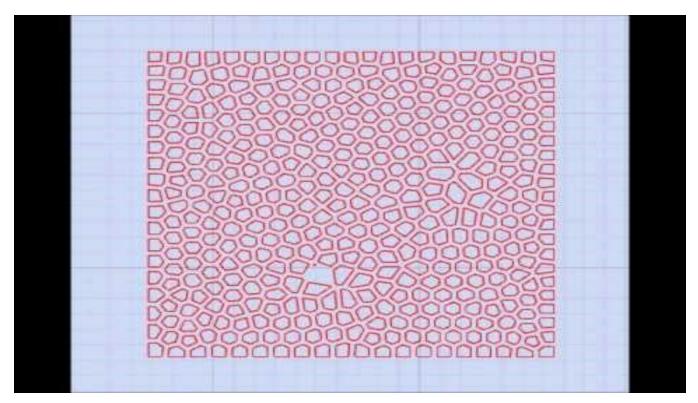


Centroidal Voronoi Diagram

Alternate two steps:

- 1. Compute Voronoi cells
- 2. Move sites to their centroids


Lloyd iterations
Same as in k-means clustering


Meshing - sizing



Vertex stretch = average of edges

Multiply sizing function (at vertices) by stretch

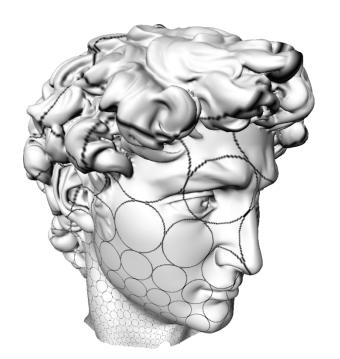

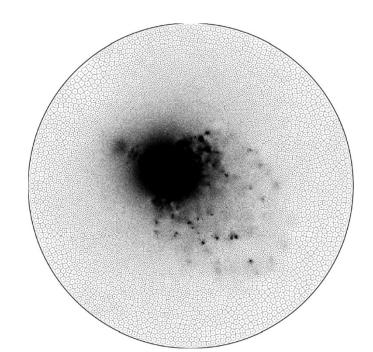


Non-uniform density


$$E(\{x_i\}_{i=1,...,n}, \{R_i\}_{i=1,...,n})$$


$$= \sum_{i=1}^{n} \int_{R_i} \rho(x) ||x_i - x||^2 dx$$

Non-uniform density

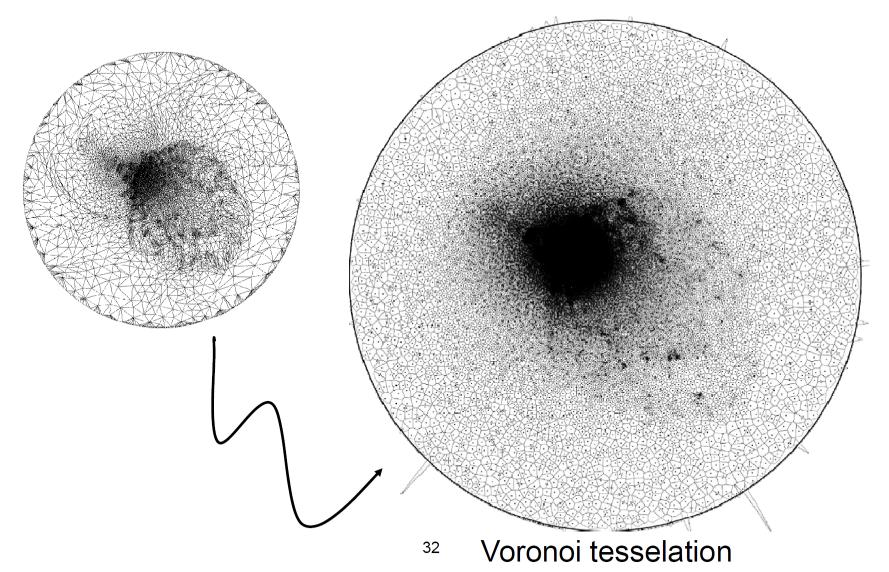

Non-uniform density

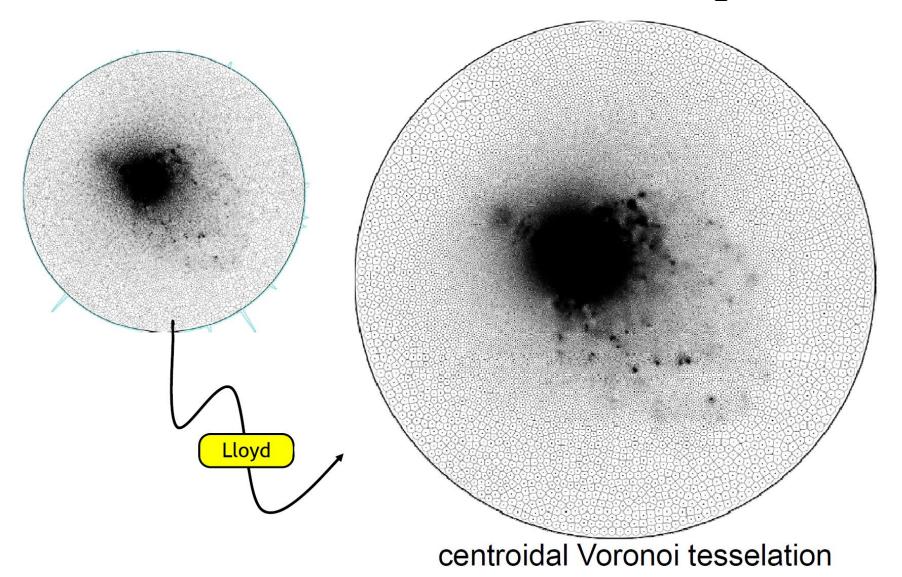

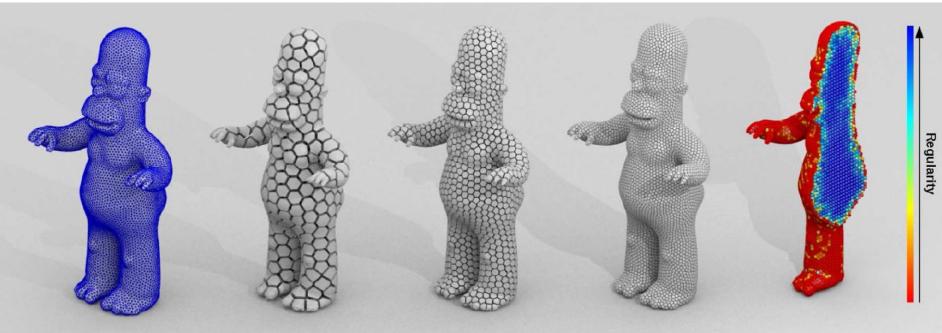



COMPUTER GRAPHICS forum

A Hierarchical Approach for Regular Centroidal Voronoi Tessellations

L. Wang, F. Hétroy-Wheeler and E. Boyer


Univ. Grenoble Alpes & Inria & CNRS, LJK, Grenoble, France li.wang@inria.fr, Franck.Hetroy@grenoble-inp.fr, edmond.boyer@inria.fr

In this paper, we consider Centroidal Voronoi Tessellations (CVTs) and study their regularity. CVTs are geometric structures that In this space, we consider Centrolial Vonnoil Testellations (CVTs) and study their regularity. CVTs are geometric structures that coulder regular selectations of geometric objects and are which such all substitutes modelling and analysis. While several efficient iterative schemes, with defined local convergence properties, have been proposed to compute CVTs, little attention has been paid to the evaluation of the resulting cell decompositions. In this paper, we propose a regularity criterion that allows us to evaluate and computer CVTs independently of their sizes and of their cell numbers. This criterion allows us to evaluate and computer CVTs independently of their sizes and of their cell numbers. This criterion allows us to evaluate and computer CVTs the shadion to proposing a regularity criterion, this paper also considers computational strategies to determine of control of the computational strategies to determine the computation of the control of the control of the computational strategies to determine CVTs with promobyls better regularities than existing methods. We illustrate these principles with a wale range of experiment on synthetic and read models.

ACM CCS: Computer Graphics [1.3.5]: Computational Geometry and Object Modelling—Curve, surface, solid and object representations; 15.3 [Pattern Recognition]: Clustering—

Smoothing: Centroidal Voronoi Diagram

- Relocate vertices (smoothing) to control sizing (sampling)
- Lloyd algorithm on surface mesh
 - On 2D umbrella compute VD of vertex + neighbors
 - Place vertex at center of mass of it's cell
 - Repeat

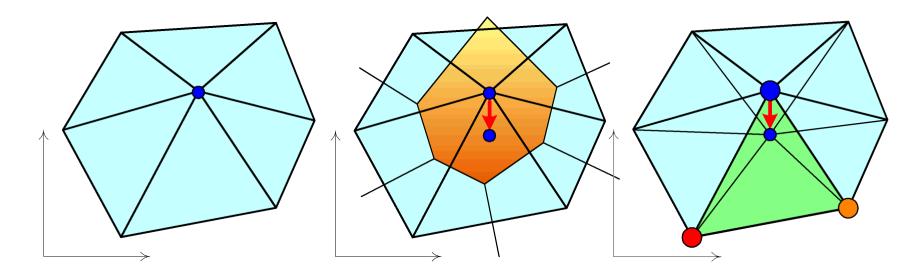

Alternative: Blue noise

Blue Noise through Optimal Transport

Fernando de Goes Caltech Katherine Breeden Stanford Victor Ostromoukhov Lyon 1 U./CNRS Mathieu Desbrun Caltech

Abstract


We present a fast, scalable algorithm to generate high-quality blue noise point distributions of arbitrary density functions. At its core is a novel formulation of the recently-introduced concept of capacity-constrained Voronoi tessellation as an optimal transport problem. This insight leads to a continuous formulation able to enforce the capacity constraints exactly, unlike previous work. We exploit the variational nature of this formulation to design an efficient optimization technique of point distributions via constrained minimization in the space of power diagrams. Our mathematical, algorithmic, and practical contributions lead to high-quality blue noise point sets with improved spectral and spatial properties.

CR Categories: I.4.1 [Image Processing and Computer Vision]:

Digitization and Image Capture—Sampling.

Keywords: Blue noise, power diagram, capacity constraints.

Links: ♦DL ☑PDF 圖WEB ♣CODE

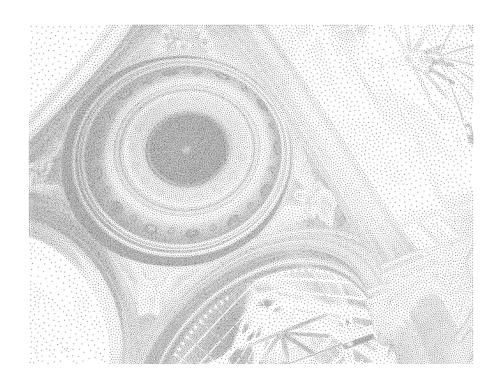


Alternative: Blue noise





Reduction to 2D/Global Remeshing


1. Segment surface into charts

- How? How many charts?
- 2. Parameterize in 2D
 - Which parameterization to choose?
- 3. Mesh charts in 2D (Delaunay)
 - Sizing ~ distortion
 - Take care of shared boundaries
- 4. Project back









Segmentation


- Chart Properties
 - Disk topology
 - Low distortion
 - Ideal: Developable charts
- Approaches
 - Single chart
 - Generate (short) cuts to reduce genus
 - Cut through high curvature/distortion vertices
 - Multiple charts
 - More convex boundaries easier to handle

Lloyd Iterations

for segmentation

Initialization: select random triangles = seeds

- 1. Grow charts around seeds greedily
- 2. Find new seed for each chart
 - E.g. centroid
- 3. Repeat

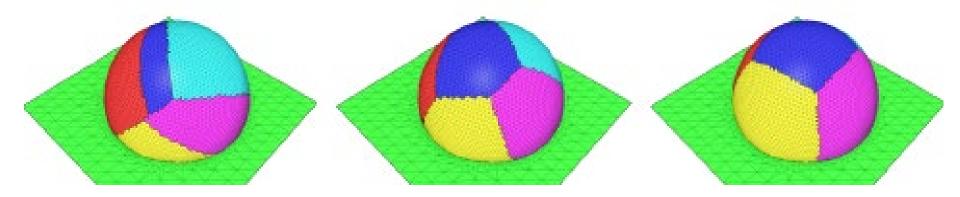

Proxies

- Charts represented by proxies used for reseeding and growth
- Example: Planar charts
 - Proxy: Normal to plane N_c
 - Compute: Average normal of chart triangles
 - Growth metric: Normal difference $N_C \cdot n_t$



Example Results



Related: zippables

Shape Representation by Zippables

CHRISTIAN SCHÜLLER, ROI PORANNE, and OLGA SORKINE-HORNUNG, ETH Zurich, Switzerland


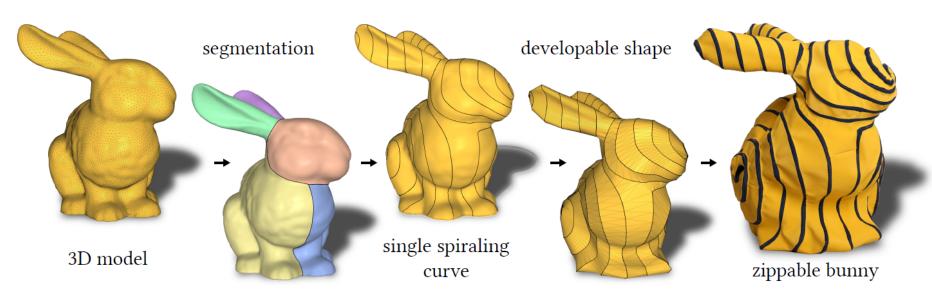


Fig. 1. The pipeline of our approach. Starting from a 3D model, the user decomposes the shape into topological cylinders. Our algorithm automatically produces a single continuous curve on the shape that spirals along the cylinders. It proceeds to cut the shape along the curve and creates a developable surface that can be trivially unfolded into a single 2D shape – the so called *zippable*. Based on the flattening, plans for laser cutting it from fabric are generated. Finally, we attach a zipper with a single slider to the boundary of the zippable. Zipping it up reproduces a faithful approximation of the input model.


Related: zippables

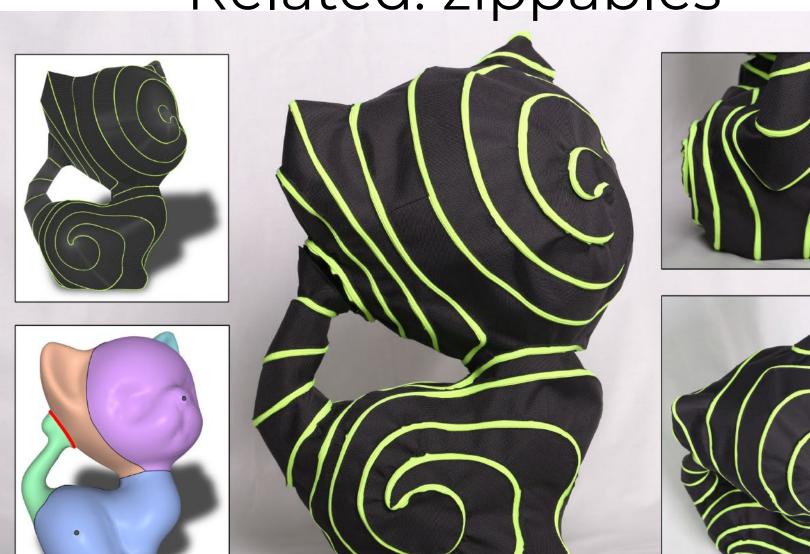

Boundary


Need mesh consistency along boundaries

Enforce shared boundary vertex positions

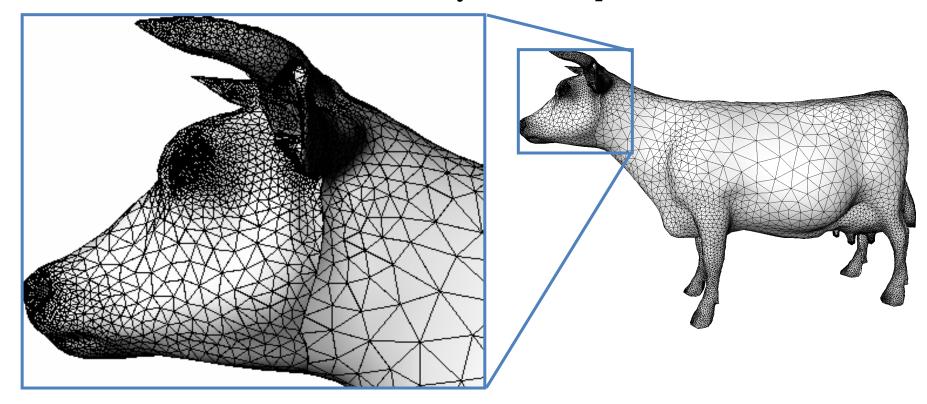

Boundaries


• Consistent but visible...

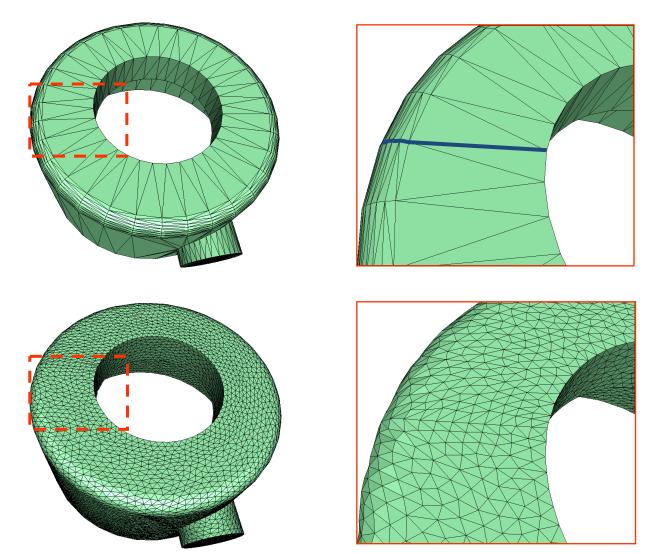



Features

Preserving features – locate surface creases and prevent removing them

 Special handling by segmentation and/or 2D meshing







Global Methods - Properties

- Three major components:
 - Segment
 - Parameterize
 - Mesh in 2D
- Strongly depends on parameterization quality
 - In turn depends on segmentation
- Typically more complex to implement from scratch

Tet Meshing

An active area of research!

Tetrahedral Meshing in the Wild

YIXIN HU, New York University
QINGNAN ZHOU, Adobe Research
XIFENG GAO, New York University
ALEC JACOBSON, University of Toronto
DENIS ZORIN, New York University
DANIELE PANOZZO, New York University

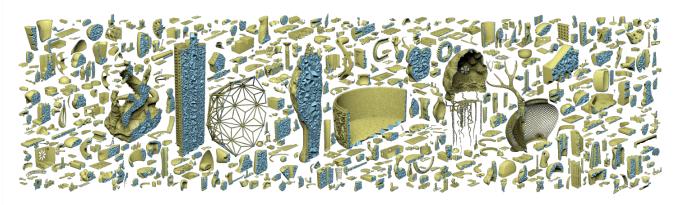


Fig. 1. A selection of the ten thousand meshes in the wild tetrahedralized by our novel tetrahedral meshing technique.

We propose a novel tetrahedral meshing technique that is unconditionally robust, requires no user interaction, and can directly convert a triangle soup into an analysis-ready volumetric mesh. The approach is based on several core principles: (1) initial mesh construction based on a fully robust, yet efficient, filtered exact computation (2) explicit (automatic or user-defined)

ACM Reference Format:

Yixin Hu, Qingnan Zhou, Xifeng Gao, Alec Jacobson, Denis Zorin, and Daniele Panozzo. 2018. Tetrahedral Meshing in the Wild . *ACM Trans. Graph.* 37, 4, Article 60 (August 2018), 14 pages. https://doi.org/10.1145/3197517.3201353

Hex Meshing

All-Hex Mesh Generation via Volumetric PolyCube Deformation

James Gregson¹, Alla Sheffer¹ and Eugene Zhang²

¹University of British Columbia, Canada


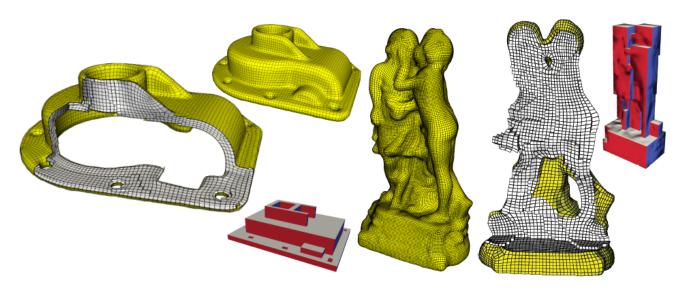


Figure 1: High quality all-hex meshes of complex shapes automatically generated by our method and the PolyCubes we compute to create them. For the kiss both fine and coarse meshes are shown.

²Oregon State University, United States


Hex Meshing

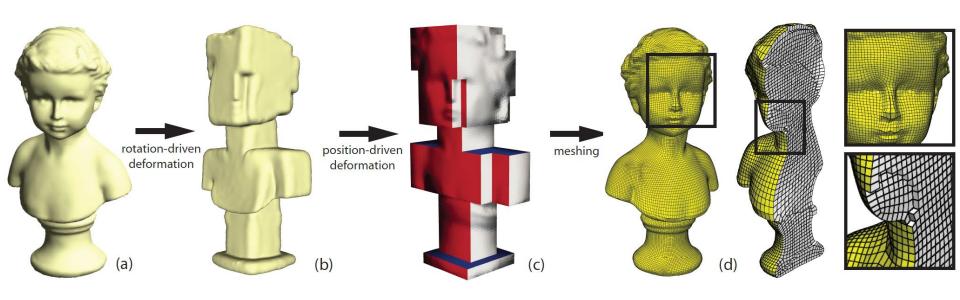

How to (re)mesh surfaces?

Delaunay triangulation?

- What is Delaunay criterion on surface?
 - Option 1: Use sphere instead of circle
 - Works for volumetric meshes (tets)
 - Option 2: Use pairwise test only
 - Theoretical Delaunay properties?
 - Option 3: Intrinsic Delaunay
- Boundary recovery = Approximation quality

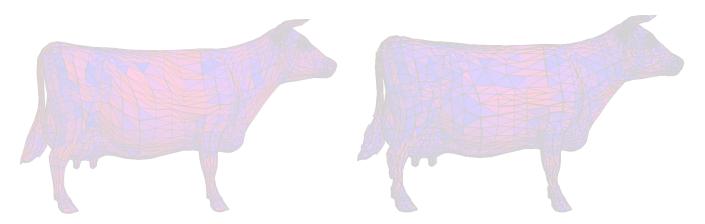

<u>Intrinsic D</u>elaunay

Discrete Comput Geom (2007) 38: 740–756 DOI 10.1007/s00454-007-9006-1

A Discrete Laplace–Beltrami Operator for Simplicial Surfaces

Alexander I. Bobenko · Boris A. Springbor

Received: 8 September 2005 / Revised: 24 February 200 Published online: 6 September 2007 © Springer Science+Business Media, LLC 2007

Abstract We define a (Definition 16). It depe edge weights are positive elements Laplacian (the intrinsic Delaunay trian tions of discrete harmon surfaces. The definition

An Algorithm for the Construction of Intrinsic Delaunay Triangulations with Applications to Digital Geometry Processing

Matthew Fisher Caltech Boris Springborn TU Berlin Peter Schröder Caltech Alexander I. Bobenko TU Berlin

Abstract

The discrete Laplace-Beltrami operator plays a prominent role in

Navigating Intrinsic Triangulations


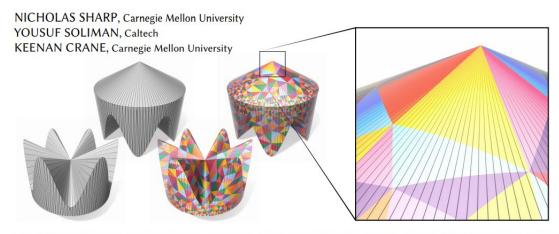


Fig. 1. Our data structure makes it possible to treat a crude input mesh (*left*) as a high-quality *intrinsic triangulation* (*right*) while exactly preserving the original geometry. Existing algorithms can be run directly on the new triangulation as though it is an ordinary triangle mesh. Here, a mesh with tiny input angles becomes a geometrically identical Delaunay triangulation with angles no smaller than 30°—a feat impossible for traditional, extrinsic remeshing.



d) surface as defined by the intrinsic Delaunay triangu-

Intrinsic Delaunay

Idea: keep the geometry!

Use Delaunay criterion for curvilinear triangles

 Edges = geodesics (locally shortest paths)



Intrinsic Delaunay

Idea: keep the geometry!

Use Delaunay criterion for curvilinear triangles

- Edges = geodesics (locally shortest paths)
- Generate = flips

